

# 801R Small Diameter

APOLLOPRESS® Press End Copper Reducing Coupling  
CxC (3/4" x 1/2" through 2" x 1-1/2")

## SUBMITTAL SHEET

# "Apollo" Flow Controls



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

### DESCRIPTION

The APOLLOPRESS® 801 Small Diameter Press Coupling features a lead free dezincification resistant copper body and an EPDM o-ring. APOLLOPRESS® products are manufactured utilizing proven ASTM materials and standards. Proudly made in the USA.

### FEATURES

- Lead Free Construction
- Ridgid® XL Press Tool Compatible
- Leak Before Press® Technology
- Made in USA

### PERFORMANCE RATING

- Maximum Pressure: 300 psi
- Temperature Range: 32°F to 250°F depending on application

### STANDARD MATERIALS LIST

Body	UNS C12200 Copper
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

### APPROVALS

- UPC, cUPC & IPC
- IAPMO PS I17-2016 & TIL MSE-13
- NSF/ANSI 61 - Water Quality
- NSF/ANSI 372 - Lead Free

### APOLLOPRESS®


- Small Diameter Sizes 3/4"x1/2" thru 2"x1-1/2"
- Model 801R, Reducing Coupling

APOLLOPRESS® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. Press connectors are not suitable for steam or flammable gas service.

### DIMENSIONS

ITEM NO.	SIZE (IN.)	DIMENSIONS (IN.)								WEIGHT (LB.)
		A	B	C	D	E	HEIGHT	WIDTH	DEPTH	
10075900	3/4x1/2	2.14	1.24	0.92	0.44	0.79	1.24	2.14	1.24	0.13
10075144	1x1/2	2.45	1.49	0.97	0.64	0.85	1.49	2.45	1.49	0.15
10075898	1x3/4	2.3	1.49	0.86	0.48	0.95	1.49	2.3	1.49	0.18
<b>10066073</b>	1-1/4x1/2	4.12	1.75	1.04	2.23	0.85	1.75	4.12	1.75	0.43
<b>10066001</b>	1-1/4x3/4	3.98	1.75	1.04	2.09	0.85	1.75	3.98	1.75	0.51
10075896	1-1/4x1	2.4	1.75	1.06	0.38	0.97	1.75	2.4	1.75	0.22
<b>10066380</b>	1-1/2x1-2	4.87	2.09	1.43	2.63	0.81	2.09	4.87	2.09	0.81
<b>10066381</b>	1-1/2x3/4	4.9	2.09	1.43	2.59	0.89	2.09	4.89	2.09	0.75
<b>10066003</b>	1-1/2x1	4.6	2.09	1.43	2.25	0.93	2.09	4.6	2.09	0.78
10075128	1-1/2x1-1/4	2.87	2.11	1.2	0.63	1.04	2.11	2.87	2.11	0.4
<b>10066082</b>	2x1/2	5.87	2.56	1.58	3.44	0.85	2.56	5.87	2.56	0.96
<b>10066398</b>	2x3/4	5.71	2.56	1.59	3.24	0.89	2.56	5.7	2.56	1.08
<b>10066005</b>	2x1	5.49	2.56	1.59	2.94	0.97	2.56	5.49	2.56	1.11
<b>10066072</b>	2x1-1/4	5.18	2.56	1.59	2.55	1.04	2.56	5.18	2.56	1.03
10075130	2x1-1/2	3.72	2.56	1.51	0.9	1.31	2.56	3.72	2.56	0.64

Note: Item numbers in BOLD are crimped two-piece construction.

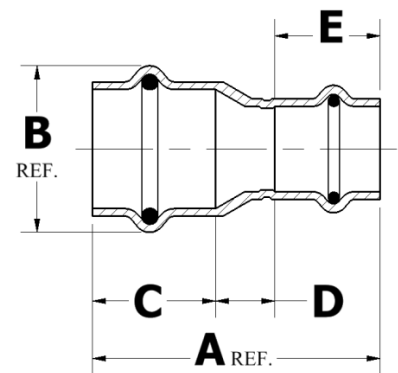

\*LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law III-380. ANSI 3rd party approved and listed.