

8712-R Small Diameter

APOLLOPRESS® Press End Copper/Brass
Reducing Outlet Tee CxCxF (3/4"x1/2" through 2"x3/4")

SUBMITTAL SHEET

"Apollo" Flow Controls



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

DESCRIPTION

The APOLLOPRESS® 8712-R Small Diameter Press Reducing Outlet Tee with Female NPT features a lead free dezincification resistant copper body and an EPDM o-ring. APOLLOPRESS® products are manufactured utilizing proven ASTM materials and standards. Proudly made in the USA.

FEATURES

- Lead Free Construction
- Leak Before Press® Technology
- Ridgid® XL Press Tool Compatible
- Made in USA

APPROVALS

- UPC, cUPC & IPC
- IAPMO PS 117-2016 & TIL MSE-13
- NSF/ANSI 61 - Water Quality
- NSF/ANSI 372 - Lead Free
- IAPMO File Listings: 4861, 6174 & N-4951

PERFORMANCE RATING

- Maximum Pressure: 300 psi
- Temperature Range: 32°F to 250°F depending on application

APOLLOPRESS®

- Small Diameter Sizes 3/4"x1/2" through 2"x3/4"
- Model 8712-R, Reducing Outlet Tee w/ Female NPT


APOLLOPRESS® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. Press connectors are not suitable for steam or flammable gas service.

STANDARD MATERIALS LIST

Elbow Body	UNS C12200 Copper
Brass Body	UNS C27451 Brass
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

ITEM NO.	SIZE (IN.)	DIMENSIONS (IN.)										WEIGHT (LB.)
		A	B	C	D	E	F	G	HEIGHT	WIDTH	DEPTH	
10066581	3/4x3/4x1/2	3.18	2.96	0.90	0.69	0.90	0.69	2.34	2.96	3.18	1.24	0.36
10066582	1x1x1/2	3.18	3.25	0.90	0.69	0.90	0.69	2.50	3.25	3.18	1.49	0.46
10066583	1x1x3/4	3.50	3.40	0.90	0.85	0.90	0.85	2.66	3.40	3.50	1.49	0.54
10066584	1-1/4x1-1/4x1/2	3.60	3.61	1.03	0.77	1.03	0.77	2.73	3.61	3.60	1.74	0.74
10066585	1-1/4x1-1/4x3/4	3.60	3.67	1.03	0.77	1.03	0.77	2.80	2.67	3.60	1.74	0.78
10066586	1-1/2x1-1/2x1/2	4.18	4.04	1.43	0.66	1.43	0.66	2.98	4.04	4.18	2.11	0.92
10066587	1-1/2x1-1/2x3/4	4.18	4.10	1.43	0.66	1.43	0.66	3.05	4.10	4.18	2.11	0.96
10066588	2x2x1/2	4.26	4.30	1.58	0.55	1.58	0.55	3.01	4.30	4.26	2.58	1.95
10066589	2x2x3/4	4.74	4.46	1.58	0.79	1.58	0.79	3.17	4.46	4.74	2.58	1.4

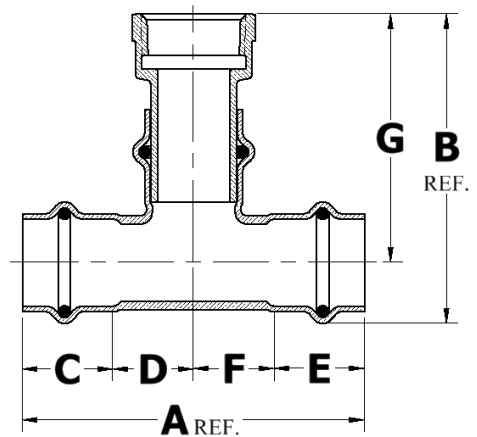

*LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law III-380. ANSI 3rd party approved and listed.

Customer Service (704) 841-6000
www.apolloflowcontrols.com

This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit apolloflowcontrols.com for the most current information.

