


- No-drip siliconized formula for fast application on metal threads
- Pressures: 350 PSI (24 BAR) for gas; 500 PSI (34 BAR) for liquid
- Sealing temperature: up to 350°F (177°C)
- · Lead-free, non-toxic, no V.O.C.'s
- · Made in U.S.A.
- DO NOT USE ON OXYGEN SERVICE; USE OXYTITE PASTE OR SLIC-TITE PTFE TAPE

For Use On:

Metal

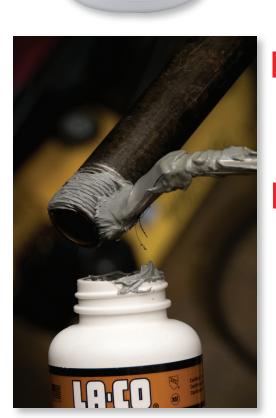

NE COULE PAS À RACCORDS DE TUYAUX

NET 8 FL. OZ. (1/2 PT.) 236.6 M

Approvals/Certifications:

- NSF
- UPC

ORDERING INFORMATION

Part No. Size QTY/Case 12219 1/2 Pint BIC 24 5 lb. 6 12108

BIC=Brush In Cap



