

► **Code Number**  
2102459

► **Description**  
Vitreous china wall hung water closet.

► **Flush Cycle**  
Flush volume is determined by the flushometer used with fixture  
1.1 to 1.6 gpf/4.2 to 6.0 Lpf



- **Fixture Specification**
- White Vitreous china
  - Wall hung, wall outlet
  - Siphon jet flushing action achieves 1000g Map score
  - Static load rating of 750 lbs (see Notes)
  - Integral flushing rim
  - Elongated bowl
  - Water spot area 11 1/4" x 8 1/2"
  - Toilet seat not included
  - 1-1/2" I.P.S. top spud inlet
  - 2 1/8" fully glazed trapway

- Recommended Seats**
- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
  - Church - 295CT/295SSCT & 2155CT/2155SSCT

- **Plumbing System Requirements**
- Maximum Static Pressure: 80 PSI
  - Minimum Flowing Pressure: 25 PSI
  - Minimum Flow Rate: 25 GPM

- **Product Specification**
- Elongated water closet shall be made of vitreous china with a 1-1/2" top spud. Bowl shall be ADA compliant. Water Closet shall be wall hung. Water closet shall be Sloan Model ST-2459.

- **Notes**
- This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).
  - All information contained in this document subject to change without written notice
  - NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.
  - Static load tested according to the procedure in Section 6.7 of ASME A112.19.2. Not recommended for bariatric use.

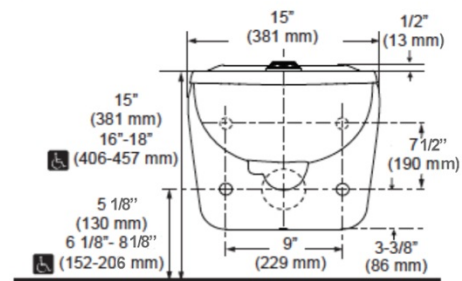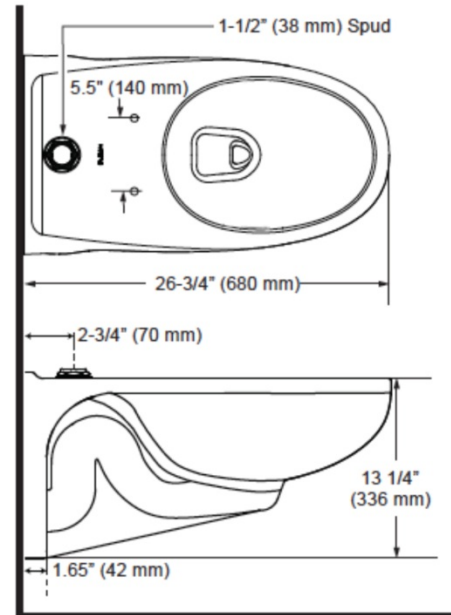

► **Compliance & Certifications**  
CEC Compliant



This space for Architect/Engineer Approval